

קשר ימי אונליין




01-001/01-002

REAR FLIP SEAT

WILL FIT CLUB CAR® PRECEDENT®

INSTALLATION INSTRUCTIONS

INCLUDED:

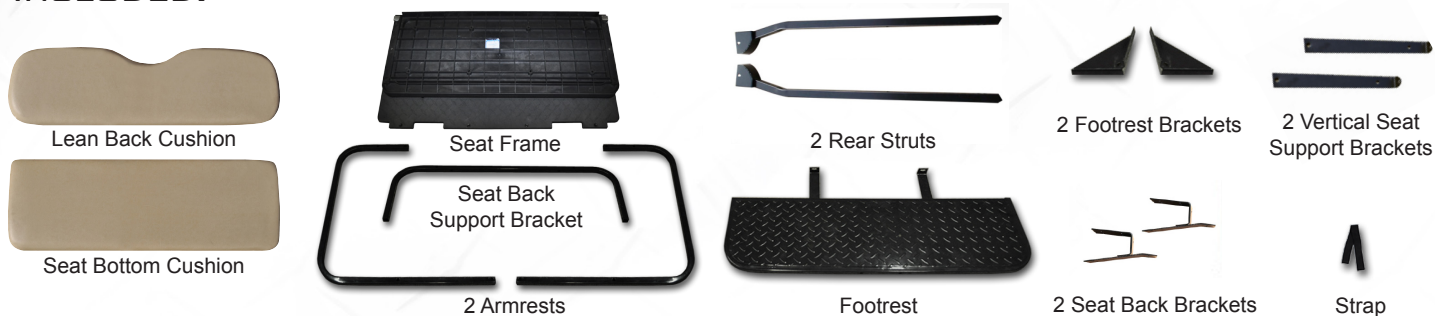

1

Remove front seat hardware located behind seat. Remove front seat cushion. Retain hardware.




Remove upper rear canopy strut hardware. Use a prop to support canopy. Retain hardware.

2

3
Remove lower rear strut hardware located on inside of basket. Remove factory struts. Retain hardware.



4
Remove hardware from base of basket. Two bolts are located in the rear and two bolts located in the front. Retain hardware.

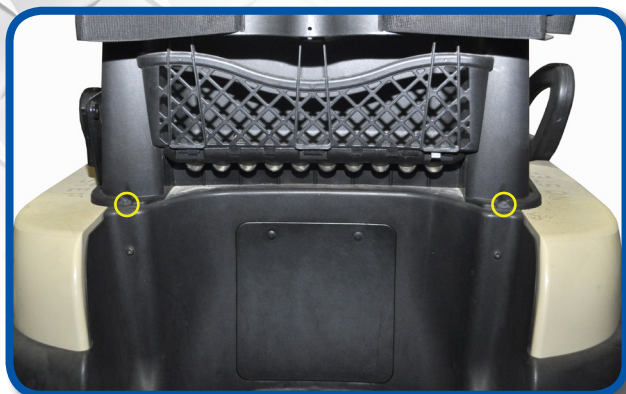


5
Remove hardware from basket retainer. Remove basket retainer. Retain hardware.



6
Attach rear vertical seat support brackets to base of cart using hardware in Pack 1.



7
Attach seat frame using hardware retained from Step 5.

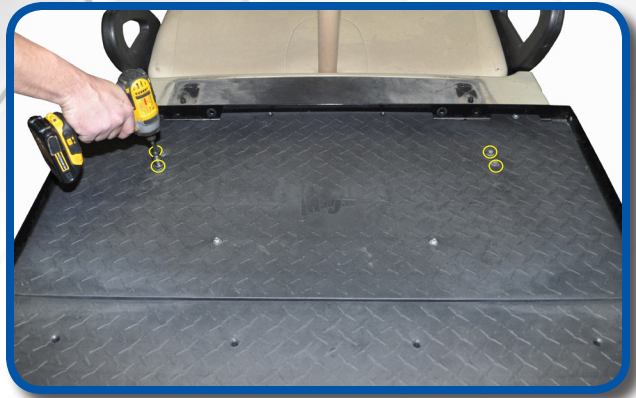

8
IMPORTANT: Do not tighten hardware until Step 16 is complete.

Attach seat frame to top of rear vertical seat support brackets using hardware from Pack 4.



9
Attach footrest to vertical seat support bracket using hardware from Pack 4.




10
Attach upper armrests and seat back support bracket using hardware from Pack 7. Repeat process on the other side.




11
Attach armrest to footrest using hardware Pack 7. Repeat process on the other side.



12
Attach rear struts to seat back support bracket using hardware from Pack 7.

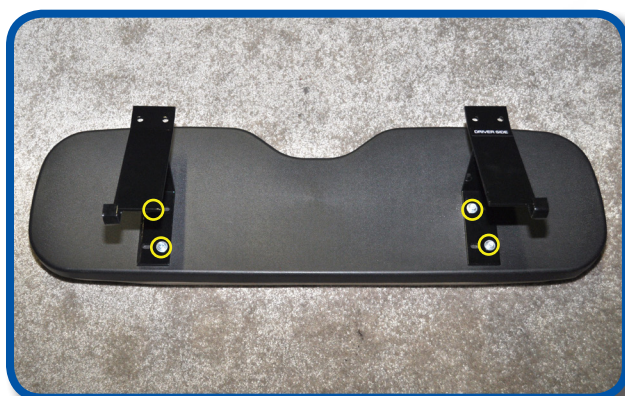

13
Attach back support brackets to rear seat back using hardware from Pack 2.

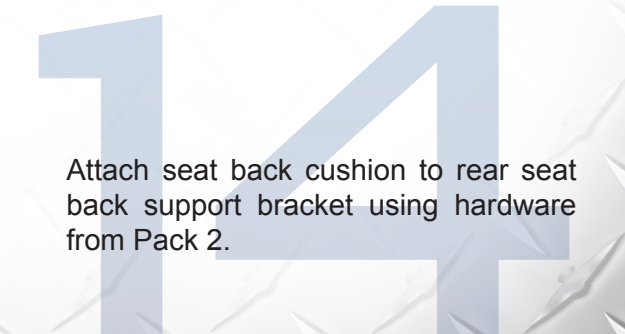

14
Attach seat back cushion to rear seat back support bracket using hardware from Pack 2.


15
Using hardware retained from Step 1, mount front seat cushion to rear seat back brackets. Tighten hardware.



16
Using remaining hardware from Pack 7, attach rear struts to roof. Tighten all hardware.

17
(1) Make sure the thickest part of the seat bottom points towards the footrest. Center seat bottom from left to right on flip frame. Attach seat bottom as shown using hardware from Pack 8.

(2) Loosen the front two screws on the seat bottom. Place strap between cushion and seat bottom. Retighten screws.

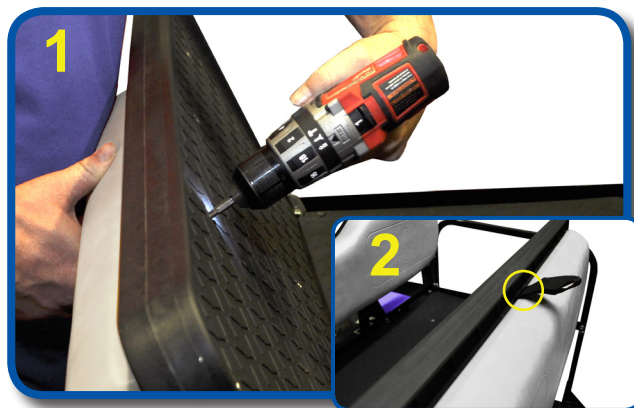

INSTALLATION COMPLETE

VISIT WWW.MYMADJAX.COM FOR MORE INSTALLATION VIDEOS

Club Car®, Club Car® Precedent®, and Club Car® DS® are registered trademarks of Ingersoll Rand, Inc. ("Ingersoll Rand"). Reference to Club Car®, Club Car® Precedent®, or Club Car® DS® or any of Ingersoll Rand's trademarks, word marks, or products is only for purposes of identifying golf carts with which this Madjax product is compatible. Madjax products are aftermarket parts and are not original equipment parts. Madjax is not connected to, affiliated with, sponsored by, or endorsed by Ingersoll Rand or any of its subsidiary companies.